


1 FLOOR PLAN
1/4" = 1'-0"

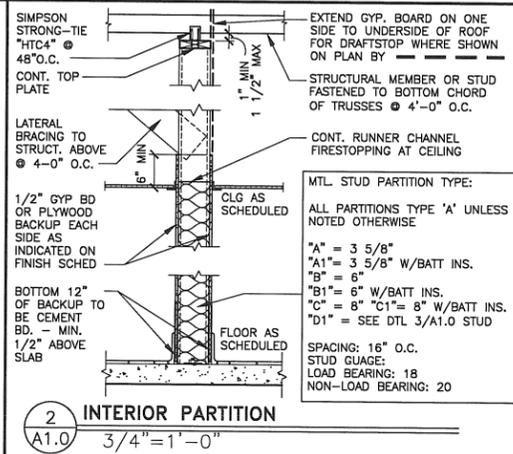

- KEY NOTES**
- C** ALUMINUM CANOPY SYSTEM ABOVE - SEE 4/A5.0 FOR NOTES - SEE ROOF PLAN FOR DIMENSIONS
 - CG** G.C. TO PROVIDE 4"x4"x5'-0" HIGH STAINLESS STEEL CORNER GUARDS AT ALL EXPOSED LOCATIONS IN KITCHEN/SUPPORT AREA. CORNER GUARDS TO START AT FINISH FLOOR. ATTACH WITH WOOD SCREWS INTO WOOD BLOCKING. BULLNOSE COVE BASE WHERE TILE MEETS STAINLESS STEEL CORNER
 - CP** CONCRETE EQMT PAD - SEE STRUCTURAL
 - CT** CERAMIC WALL TILE: EUROWEST
COLOR: MADE UNI GRIGIO SIZE 12"x24"
GROUT: MAPEI 27 SILVER -JOINT TO BE 1/8" MAX. COORDINATE WITH THE McDONALD'S AREA CONSTRUCTION MANAGER
 - CT** CERAMIC WALL TILE: EUROWEST FEEL
COLOR: BLACK TASTE SIZE 10"x30"
GROUT: MAPEI 10 BLACK -JOINT TO BE 1/8" MAX. COORDINATE WITH THE McDONALD'S AREA CONSTRUCTION MANAGER
 - CT** CERAMIC WALL TILE: EUROWEST
COLOR: GREEN TASTE SIZE 10"x30"
GROUT: MAPEI 27 SILVER -JOINT TO BE 1/8" MAX. COORDINATE WITH THE McDONALD'S AREA CONSTRUCTION MANAGER
 - DS** DROPPED SOFFIT ABOVE - SEE REFLECTED CEILING PLAN
 - DW** DECOR WALL - VERIFY EXACT SIZE AND PLACEMENT WITH DECOR PLANS -SEE 2/A1.0

- SYMBOL LEGEND**
- A** PARTITION TYPE TAG SEE 2/A1.0
 - D** DRAFT STOPPING - SEE 2/A1.0
 - 7** DOOR TAG - SEE DOOR SCHEDULE ON A6.0
 - X** KEY NOTE
 - FB** CO2 FILL BOX (EQUIPMENT SCHEDULE ITEM 49.00)
 - FB** OPTIONAL BULK OIL FILL BOX (EQPM SCHEDULE ITEM 700.18) CONFIRM USE WITH McDONALD'S AREA CONSTRUCTION MANAGER
 - FL** FLOOR LINE - CHANGE IN MATERIAL - SEE DECOR DRAWINGS
 - LL** LEVEL LANDING @ EXT. DOOR W/ MAX. 2% RUNNING/CROSS SLOPE AWAY FROM BUILDING
 - RL** ROOF ACCESS LADDER W/HATCH ABOVE SEE STRUCTURAL FRAMING PLAN FOR LOCATING DIMENSIONS
 - T** TRELLIS SYSTEM ABOVE SEE 4/A5.0 FOR NOTES SEE ROOF PLAN FOR DIMENSIONS

- GENERAL NOTES**
- EXTERIOR DIMENSIONS ARE TO COLUMN REFERENCE LINES AND EXTERIOR FACE OF FINISH UNLESS OTHERWISE NOTED. INTERIOR DIMENSIONS ARE TO FACE OF FINISH.
 - SEE 4/A5.0 FOR EXTERIOR WALL ASSEMBLY TYPES. SEE 2/A1.0 FOR INTERIOR PARTITION TYPES. INTERIOR PARTITIONS ARE TYPE 'A' UNLESS NOTED OTHERWISE.
 - SEE EXTERIOR ELEVATIONS FOR WINDOW TYPES
 - SEE SHEET A6.0 FOR DOOR AND ROOM FINISH SCHEDULES
 - SEE SITE PLAN FOR SIDEWALKS, RAMP, ETC.
 - GC TO PROVIDE ADA SIGNAGE PACKAGE AND INSTALL SIGNS AT LOCATIONS AND POSITIONS INDICATED IN PACKAGE OR AS REQUIRED BY LOCAL CODES. SIGNAGE PACKAGE SUPPLIED BY: FORREST PERMA-SIGN 9292 1ST ST., BOX 588 www.forrestpermasigns.com NEW ROCHELLE, NY 10802
 - MAXIMUM OCCUPANCY SIGN TO BE POSTED PER LOCAL CODE. SIGN FURNISHED AND INSTALLED BY GENERAL CONTRACTOR.
 - ALL HANDSINK LOCATIONS SHALL HAVE CEMENT BOARD BACKING 48" IN HEIGHT A.F.F.
 - GC TO COORDINATE ALL REQUIRED BLOCKING FOR WALL HUNG EQUIPMENT, SHELVES, ETC. FOR PROPER INSTALLATION HEIGHTS.

STATE OF GEORGIA
PHILIP PRYOR
REGISTERED ARCHITECT

CORE STATES GROUP

PREPARED BY: **McDonald's USA, LLC**

McDonald's USA, LLC
These drawings and specifications are the confidential and proprietary information of McDonald's USA, LLC. One shall not be copied or reproduced without the written permission of McDonald's USA, LLC. Use of these drawings for use on a different site or at a later time, use of the services of properly licensed architects and engineers, reproduction of the contract documents for use on another project is not authorized.

DRAWN BY: DDC
SITE DATE: 1/2013
REVIEWED BY: PJP
DATE ISSUED: 07/2013
SMMVA, GA

TITLE: 2013 STANDARD BUILDING
RESERVATION: 4597-MASONRY/STEEL-5'R-5'F

8" MASONRY LOAD BEARING WALLS W/ 4" CLAY BRICK VENEER
STEEL TRUSS ROOF FRAMING
E.L.F.S. EXTERIOR FINISH ARCH/ENTRY

SHEET NO. 010-1386.00.0
A1.0
FLOOR PLAN

REV	DATE	DESCRIPTION

