

**Job Name:**

Windy Hill

Job Location:


Smyrna, GA

Quote No:**Type:****Catalog Number:**

AWDE3 P40 40K MVOLT MS AL3 BK FRBM ST TBK PR7 UA WDA 14 F4C 17D C03 BK LAB ASSY7210

0° View**90° View****Ordering Information****Luminaire****Catalog Number:** AWDE3 P40 40K MVOLT MS AL3 BK FRBM ST TBK PR7 UA**Series:** (AWDE3) Acrylic Washington Postlite LED**Performance Package:** (P40) P40 performance package**Color Temperature:** (40K) 4000K**Voltage:** (MVOLT) 120-277V**Housing:** (MS) Modern style, swing open design**Optics:** (AL3) Type III Acrylic Refractor**Finish:** (BK) Black**Trim:** (FRBM) Full cover, ribs, band and medallions**Finial/Trim:** (ST) Painted cast aluminum standard finial**Trim Finish:** (TBK) Black trim**Photocontrol Receptacle:** (PR7) 7 pin NEMA dimmable photocontrol receptacle**Shipping Option:** (UA) Optic and housing ships attached in one carton**Pole****Catalog Number:** WDA 14 F4C 17D C03 BK LAB**Series:** (WDA) Wadsworth aluminum pole**Pole Height:** (14) 14 feet**Shaft Style:** (F4C) Shaft, 4" diameter fluted, .125 wall**Base Diameter:** (17D) 17" Base, Diamond Pattern Bolt Circle**Pole Top Mounting:** (C03) Tenon, 3.00 O.D. x 3" tall**Finish:** (BK) Black**Base Mounting:** (LAB) Less anchor bolt

Assembly Drawing

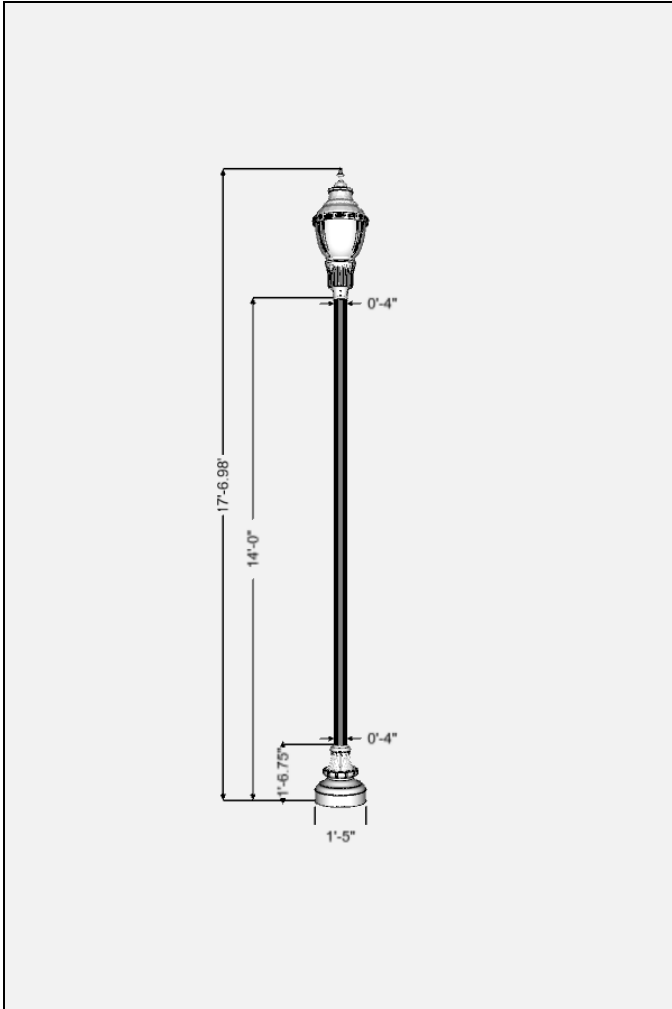

Description	Height/Width
Assembly Overall Height	17'-6.98"
Luminaire Mounting Height	14'-0"
Pole Height	14'-0"
Pole Shaft OD At Top	0'-4"
Pole Shaft OD At Bottom	0'-4"
Pole Base Height	1'-6.75"
Pole Base Width	1'-5"


Windload

Passed Wind Speed: 100 mph

Windload Result: 72%

Evaluated per: AASHTO 2013

Anchorage/Orientation Plan

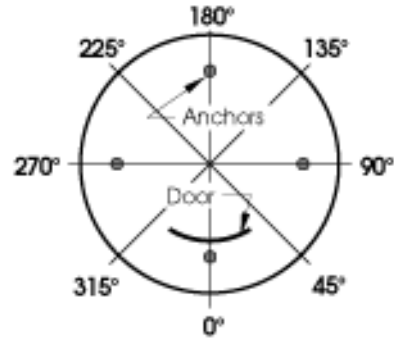

Note: Door = Hand Hole

Ordering Information

Qty	Catalog Number
1	AWDE3 P40 40K MVOLT MS AL3 BK FRBM ST TBK PR7 UA
1	WDA 14 F4C 17D C03 BK

Customer Approval Signature:

Date: